

## MEMBRANE USE

The Vapor Shark is designed for use with Vaportek approved replacement membranes only. Use of non-approved replacement membranes will void warranty coverage. For best results, store membranes in a cool, dry location and keep away from extreme heat. Replace membranes after 270 hours of use. The membrane is sealed. Do not puncture or open the membrane. We recommend 3X Industrial and/or S.O.S./Smoke Odor Solution replacement membranes.

### Reorder Information:

Vapor Shark unit only (#90-0950)  
Single 3X Industrial (#90-0953)  
Single Lemon\* (#90-0953-05)  
Single S.O.S. (#90-0953-85)  
Five-Pack/3X Industrial (#90-0953/5)  
Five-Pack/Lemon\* (#90-0953-05/5)  
Five-Pack/S.O.S. (#90-0953-85/5)

\*Note: Lemon membranes are recommend for use with 3X Industrial membranes for odor control with a lighter scent. Because Lemon does not contain the same odor neutralizing capabilities of S.O.S. and 3X Industrial, it is *not* recommend for use by itself.

### Five Year Limited Warranty

Vaportek warrants this unit to be free from defects in workmanship and materials, under normal use and service, for five years from date of purchase by the original purchaser. If, at any time during the warranty period, the product is found to be defective or malfunctions, Vaportek will either repair or replace the defective part(s) at its discretion. Warranty does not apply if it is shown by Vaportek that the defect or malfunction was caused by unauthorized modifications, neglect, or abuse by the consumer. Further, any costs incurred by consumer due to unauthorized changes made to the product will not be covered by Vaportek. This warranty does not cover any other charges incurred by the consumer. Vaportek's sole responsibility is to repair or replace product within the terms stated above.

Vaportek shall not be liable for any consequential damages resulting from any breach of warranty, expressed or implied, applicable to this product. Some states do not allow the exclusion or limitation of consequential damages, so this limitation may not apply to you.

This warranty is in lieu of all other warranties, expressed or implied. The warranties of merchant ability and fitness for a particular purpose are hereby excluded beyond the five year duration of this warranty. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which can vary from state to state. This warranty applies only to products sold and used in the United States and Canada. Goods submitted for repair under this warranty must be sent, freight prepaid, to Vaportek, Inc. Call first for a return authorization number.

For service advice, contact your dealer or



P: 800.237.6367 | F: 262.246.5065

www.vaportek.com | info@vaportek.com


W226 N6339 Village Drive, Sussex, WI 53089 USA

#50-0950

Rev. 3/17

# USE AND OPERATING INSTRUCTIONS FOR THE VAPOR SHARK<sup>®</sup>

(Instructions are good for Vapor Shark 110V  
and 220V)

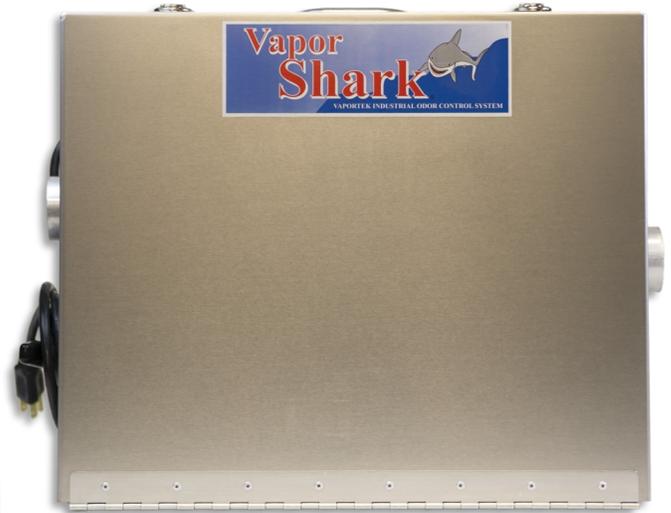

## Vapor Shark<sup>®</sup> *Powerful Industrial Odor Control*

The Vapor Shark is intended for delivering a fast, high-intensity treatment. Treats atmosphere, contents, and structures simultaneously.

### Economical

A membrane rotation schedule is included.

### Easy-to-Use

Just remove membrane from barrier bag, unfold, and lay in rack.

### Works Fast

Odor neutralizer is immediate and permanent.

### Safe & Environmentally Preferable

No chemicals or harmful ozone.

Proudly made in the USA

## THANK YOU

Thank you for purchasing the Vapor Shark<sup>®</sup> by Vaportek. The unit is an easy-to-use, portable system. It treats areas up to 50,000 ft<sup>3</sup> (10,000 ft<sup>3</sup> per membrane and unit is designed to hold up to five membranes) to effectively eliminate odor contamination quickly and safely. The unit is primarily intended for delivering a fast, high-intensity, odor-neutralizing treatment. A characteristic neutralizer fragrance will be noticeable during operation as the essential oil dry vapor circulates throughout the treatment area. Residual fragrance will dissipate in a matter of hours after treatment ends. With proper care, your Vapor Shark will provide you years of trouble-free service. Please read these use and operating instructions carefully before operating your new machine and keep it for future reference.

## SUGGESTED USES

### SMOKE/FLOOD DAMAGE

Close outside windows and doors. Open interior doors and expose contaminated areas to neutralizing dry vapor as much as possible. Let unit run several hours or overnight (may require even longer treatment depending on severity of odor damage).

### CONTENTS RESTORATION

Place unit in a deodorizing chamber, or tent contaminated items, and allow neutralizing dry vapor to penetrate. Safe for electronics, leather, elastics, and other valuable or sensitive items.

### ALSO IDEAL FOR:

- ◆ Real Estate/Foreclosures
- ◆ Hydroponic/Grow Rooms
- ◆ Crime Scene/Bioremediation
- ◆ Manufacturing/Industrial Settings
- ◆ Animal/Veterinary Facilities

## INSTRUCTIONS

Place on a firm, stable surface in a relatively high location. Can be used freestanding or permanently installed to air handling systems. For initial treatment, open air inlet to a half-inch. After 10-15 minutes, adjust air inlet as necessary to either reduce vapor output (close inlet) or increase vapor output (open farther). When unit is not in use, membrane life may be extended by securely closing the air inlet opening and the front access door. Deodorization may require as little as 15-60 minutes for light contamination. For more severe contamination, treatment may take several hours or days.

## IMPORTANT

As with any powered tool, certain precautions for safe and efficient use apply. Please follow these rules and recommendations when using the Vapor Shark:

1. Use Vaportek approved accessories only.
2. The membrane is sealed. Do not puncture or open the membrane.
3. Do not allow membrane oils to come in contact with finished surfaces. Finished surfaces may be damaged by direct contact with oils. The essential oils used in the membrane are nontoxic. However, if the oils should leak, wash affected skin, clothes, and/or surfaces with soapy water.
4. For best results, store membranes in a cool, dry location and keep away from extreme heat.
5. Replace membranes after 270 hours of use.
6. Dry vapor output will be affected by humidity, airflow, and temperature. Ideal dry vapor release occurs at 50-80°F. Vapor release significantly increases in excess of 90°F.
7. To extend membrane life, securely close the air inlet opening and the front access door when not in use.
8. Do not immerse or use where contact with water may occur.
9. Do not alter the plug or change the electrical wiring.
10. If unit appears to malfunction, unplug or turn it off immediately. Contact your dealer or Vaportek for service advice.
11. Vaportek products use natural essential oils. If an allergic reaction occurs, please discontinue use immediately.
12. To accelerate the dissipation period of the characteristic Vaportek fragrance, open windows and turn on floor fans.
13. This system provides a safe, effective *alternative* to ozone. It is *not* recommended for use with ozone generating equipment.
14. Not designed for continuous, long-term operation.

## Vapor Shark<sup>®</sup>

Fig. 1

Unlatch case & pull out membrane rack.



Fig. 2

Remove membrane from outer plastic shipping bag. Unfold membrane & place into the rack.



Fig. 3

Adjust air inlet by rotating dial clockwise to loosen lever. Move the lever up & down to adjust air flow.



Fig. 4

Plug the Vapor Shark into a 120V outlet.



Fig. 5

Click the On/Off button into the On position.

